

## Product Introduction

This two-gang switch module fits inside the wall switch box and connects to the gateway via ZigBee, enabling remote control and smart home integration. It is a key product for smart retrofit solutions.

## Features


- Compatible with external local switches
- Universal voltage compatibility for broad applications
- Compact design for concealed installation
- Power-off memory function
- Support control via Belahome APP and HyPanel



## Specification

- Product Model: QS-Zigbee-S04-2C-LN
- Input Voltage: 100 ~ 240VAC, 50/60Hz
- Communication Method: ZigBee 3.0
- Load Limit: Max 250W/Channel (inductive load)  
Max 1150W/Channel (resistive load)
- Working temperature: -10 ~ 40°C
- Working humidity: 0 ~ 95%RH (non-condensing)
- Product dimensions: 46×46×18mm
- Certification: CE, ROHS

## Wiring Diagram

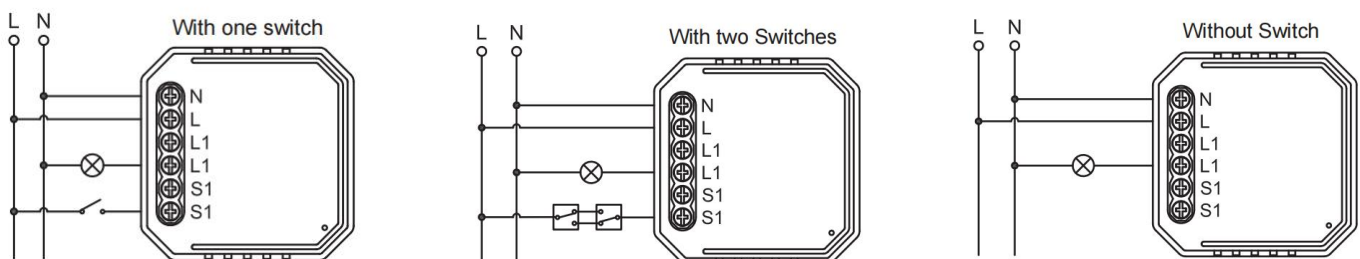

## Networking method

1. Connect the power cord correctly according to the wiring diagram to power the device;
2. Press and hold the reset button for about 10 seconds, the device indicator will flash quickly, indicating that it has entered the network pairing mode;
3. Add to the network through the gateway device.

## Product Dimension Diagram (mm)

