Curtain Control Panel (ZigBee)

Datasheet

Product Introduction

This sleek and stylish curtain switch can be easily connected to the curtain motor, transforming traditional curtains into smart ones. Whether it's in a sunny morning or a peaceful night, you can effortlessly open and close your curtains with a simple touch or remotely via the app.

Features

- Advanced touch control technology
- Stylish glass panel design
- Low power consumption
- Global voltage compatibility for wide applications


Specification

- Model: SM-SW101E-CZ / SM-SW101-CZ
- Communication Protocol: ZigBee 3.0
- Input Voltage: 110-240VAC 50~60Hz
- Maximum Current: 10A per channel
- Load Limit: 300W

Wiring Diagram



- Standby Power Consumption: <0.5W
- Glass Material: 3mm Tempered Glass
- Operating Temperature: -30 to 70°C
- Operating Humidity: 0 to 95% RH (non-condensing)
- Dimensions: 86 × 86 × 36.5 mm

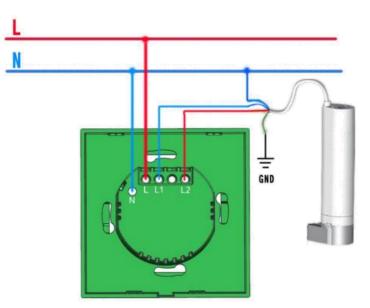



10/F, No.56 Guanri Road, Software Park II , Xiamen 361009, China Tel: +86-592-2133061 Ext: 7694 Fax: +86-592-2133061 Email: sales@akuvox.com Web: www.akubela.com

Curtain Control Panel (ZigBee)

Networking method

- 1. Connect the power cables correctly according to the wiring diagram and power on the device.
- 2. Press and hold any button for about 10 seconds until the indicator light flashes rapidly, indicating it has entered pairing mode.
- 3. Add the device to the network via the gateway.



10/F, No.56 Guanri Road, Software Park II, Xiamen 361009, China Tel: +86-592-2133061 Ext: 7694 Fax: +86-592-2133061 Email: sales@akuvox.com Web: www.akubela.com