

RG-AP9220

Wi-Fi 7 Dual-Radio
Indoor Access Point



01 Product Overview

The RG-AP9220 is a dual-radio Wi-Fi 7 access point (AP) launched by Ruijie Networks for indoor scenarios in various sectors covering higher education, government, general education, finance, and business.

In compliance with IEEE 802.11be, IEEE 802.11ax, IEEE 802.11ac Wave2, IEEE 802.11ac Wave1, and IEEE 802.11n standards, the RG-AP9220 adopts a hardware-independent dual-radio design and delivers a combined peak data rate of 3.570 Gbps, eliminating the performance bottleneck.

The RG-AP9220 is designed considering factors such as wireless network security, radio control, mobile access, QoS, seamless roaming, and Internet of Things (IoT). The RG-AP9220 can be used together with Ruijie access controllers (ACs) and RG-WIS to implement wireless user data forwarding, security, and access control.

The RG-AP9220 supports local power supply and Power over Ethernet (PoE), which can be selected based on power supply conditions. In addition, the RG-AP9220 can be mounted on a wall or ceiling, making it ideal for low-density scenarios including small- and medium-sized offices, small compartments, small conference rooms, and corridors.

02 Product Appearance



03 Product Highlights

Ultra-High Performance

- Dual-radio design with support for the latest IEEE 802.11be standard, providing 3.570 Gbps peak data rate for high-speed wireless access.
- Advanced 4096-QAM technology, delivering higher data rates and enhanced user experiences in demanding scenarios.
- Orthogonal Frequency-Division Multiple Access (OFDMA) improves network efficiency and reduces

latency, enabling seamless access for high-density deployments.

- Dynamic Frequency Selection (DFS) optimizes RF spectrum usage and minimizes radar interference, ensuring stable and efficient network performance.

High Security and Reliability

- Comprehensive wireless security features, including Wi-Fi Protected Access 3 (WPA3), 802.1X, and Private

Pre-Shared Key (PSK), delivering robust data protection.

- Multicast-to-unicast conversion and intelligent monitoring enhance the stability of multimedia services and overall network reliability.

Ease of Management

- Flexible deployment options with support for Fat, Fit, and Cloud modes, offering simplified provisioning and comprehensive remote management.
- Integration with WIS Cloud for centralized management, including device configuration, real-time monitoring, and one-click optimization for end-to-end network lifecycle management.


04 Typical Applications

Typical Scenarios

The RG-AP9220 is applicable to sparsely populated areas with simple building structures, no special obstructions, and small capacity requirements. Such areas include small offices, small meeting rooms, and corridors.

The RG-AP9220 can be flexibly deployed based on the environment.

The following figure shows the typical network topology of the RG-AP9220.

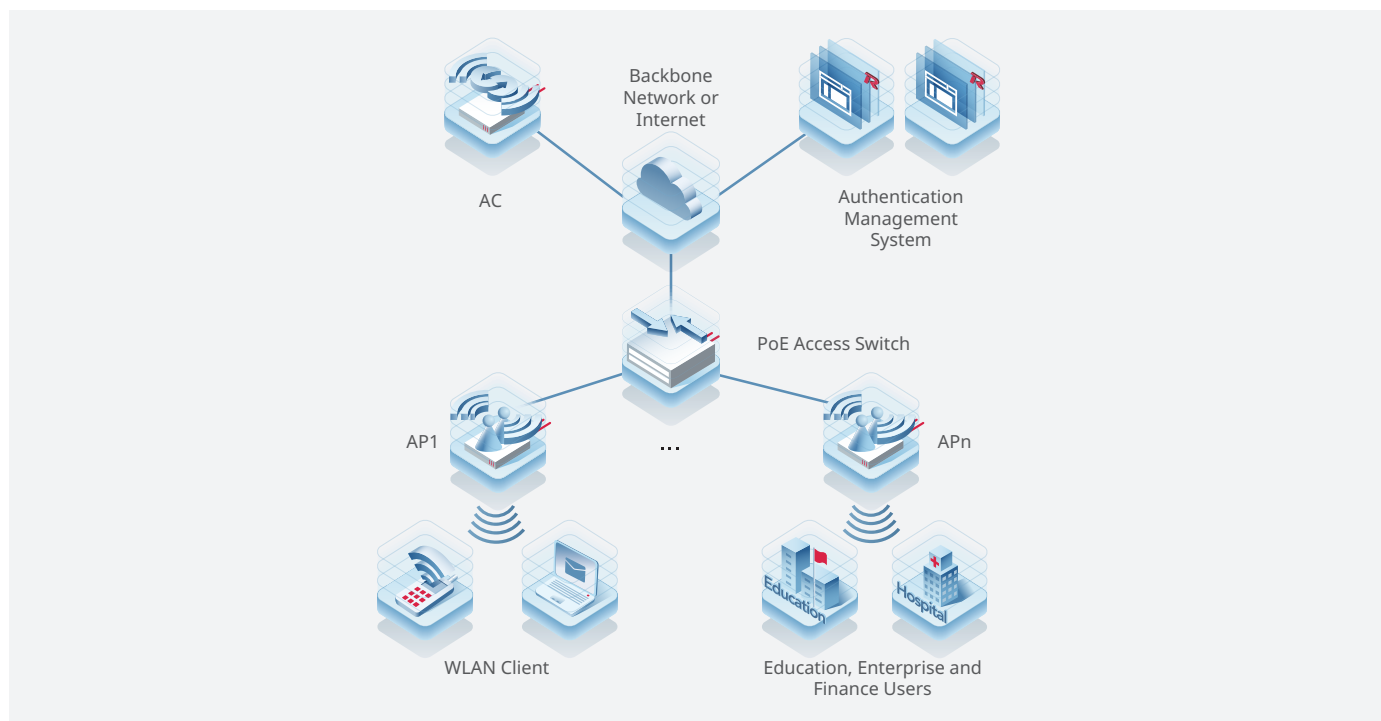

Higher Education

Classroom and Lab

Deploying Wi-Fi in classrooms and labs enables students and teachers to access network resources with ease, thereby enhancing the quality of teaching and learning. Students can engage in online learning, access course materials, and collaborate with classmates, while teachers can access teaching resources and deliver multimedia lessons.



Library

Wi-Fi deployment in libraries facilitates quick access to online resources such as e-books and academic papers for research and study by students and teachers.



Healthcare

Outpatient Service

The Wi-Fi network provides a mobile office environment for medical staff. Medical staff can use mobile devices to view patient information in real time, which significantly improves treatment efficiency. Patients can access relevant medical information through smart devices online, resulting in improved satisfaction.



Remote Monitoring and Management of Medical Devices

With Wi-Fi deployment, remote monitoring and management of medical devices become possible. Wireless medical devices such as ECG monitors and blood pressure monitors can transmit patient data in real time, thereby improving information security. Additionally, these wireless medical devices can be easily maintained and upgraded, resulting in cost reductions.



Government and Commerce

Large Conference Center

Deploying Wi-Fi in conference centers enables high-definition conference broadcasting, remote conferencing, and allows all attendees to simultaneously access wireless networks, thereby improving conference efficiency.



Note: For more applicable scenarios, contact Ruijie pre-sales engineers.

05 Product Features

Ruijie Simplified Optical Ethernet Solution

The RG-AP9220 supports Ruijie Simplified Optical Ethernet Solution.

Ruijie Simplified Optical Ethernet Solution replaces traditional Ethernet cables with optical fibers. Featuring a flat network architecture, simple implementation, neat cabling, and elastic network upgrade, this solution is

superior to traditional Ethernet networking solutions.

Multi-Service Ports

In compliance with IEEE 802.3af/at standard, the RG-AP9220 provides one 100/1000/2.5GBASE-T port with a maximum wired data rate of 2.5 Gbps to implement high-speed transmission and conversion between wireless

networks and wired networks.

The RG-AP9220 also offers one 2.5GE SFP port for high-speed data transmission, which caters for the link requirements at different customer sites.

High-Speed Wireless Access, High Energy Efficiency and Reliability

4096-QAM for High Data Rate

The RG-AP9220 adopts a dual-radio design and complies with the next-generation IEEE 802.11be standard. When two radios are enabled, the RG-AP9220 can provide a combined peak data rate of 3.570 Gbps, delivering high-speed access experience.

OFDMA for High-Density Client Access

The Orthogonal Frequency Division Multiple Access (OFDMA) feature in IEEE 802.11be enables the RG-AP9220 to divide a Wireless Local Area Network (WLAN) channel into multiple sub-channels, with each client consuming one or more sub-channels. The RG-AP9220 can implement scheduling for multiple clients to receive and send packets concurrently. This reduces contention for air interface resources and backoff, shortens network latency, and boosts network efficiency.

In a high-density deployment and access scenario, the average rate per client can be increased compared to IEEE 802.11ax.

Advanced Wi-Fi Technologies

The RG-AP9220 supports the following radio transmission technologies:

- Dynamic frequency selection (DFS) optimizes the use of available radio spectrum to prevent radar channel interference.
- Cyclic delay/shift diversity (CDD/CSD) improves downlink radio frequency (RF) performance, and converts spatial diversity to frequency diversity to avoid intersymbol interference, thus decreasing the bit error rate (BER) and effectively reducing signal distortion.
- Maximum ratio combining (MRC) improves the signal quality at the receiver end and enhances reliability and performance of received signals.

The RG-AP9220 supports the following radio channel coding technologies:

- Space-time block coding (STBC) increases the range and improves the signal reception, and enhances the reliability of data transmission.
- Low-density parity check (LDPC) corrects errors efficiently and improves the throughput.

- Transmit beam-forming (TxBF) expands the signal coverage and enhances the reliability of specific devices, thereby improving the data rate.

Intelligent Identification

The RG-AP9220 is capable of identifying smart mobile terminals (such as iOS and Android terminals) and PCs. The RG-AP9220 can be interconnected with WIS Cloud to implement visualized wireless network management based on wireless endpoint types and perform network optimization with one click.

Intelligent Local Forwarding

The RG-AP9220 integrates the intelligent local forwarding technology of Ruijie Networks, eliminating the traffic bottleneck of ACs. The data forwarding mode of the RG-AP9220 can be pre-configured through a Ruijie AC. The RG-AP9220 determines whether data needs to be forwarded by the AC or be sent to a wired network for data exchange based on SSIDs or user VLANs.

The local forwarding technology enables the RG-AP9220 to forward delay-sensitive data that requires real-time high-performance transmission over a wired network. This greatly reduces the traffic forwarding burden of the AC to better adapt to high-throughput transmission on 802.11be networks.

Abundant QoS Policies

The RG-AP9220 provides abundant QoS policies. It supports WLAN/AP/STA-based bandwidth limiting as well as Wi-Fi Multimedia (WMM) that defines priorities for different service data. Therefore, the RG-AP9220 can provide timely and quantitative transmission of audio and video services, and ensure smooth application of multimedia services.

The multicast-to-unicast conversion technology supported by the RG-AP9220 addresses the problem of video freezing caused by packet loss or high latency in Video on Demand (VoD) and other multicast applications on wireless networks, improving the user experience in multicast video services.

Comprehensive Security Protection and Ease of Use

Comprehensive Wireless Security Protection

Working with Ruijie RG-INC network management system and RG-WS series ACs, the RG-AP9220 can provide a wide range of wireless security protection features, including Wireless Intrusion Detection System (WIDS), radio interference positioning, rogue AP containment, ARP anti-spoofing, and DHCP snooping, to build a secure and reliable wireless network for users.

Multiple Easy-to-Use Authentication Modes

When used together with Ruijie authentication system

or multi-service ACs, the RG-AP9220 supports multiple efficient and convenient authentication modes including MAC address bypass (MAB) authentication. MAB authentication eliminates the need for a client to enter the username and password repeatedly after the first login.

Flexible Device Management

Flexible Fit/Fat/Cloud Mode Switching

The RG-AP9220 supports flexible switching among Fat, Fit, and Cloud modes. In Fit mode, the RG-AP9220 allows for quick provisioning and installation. Comprehensive remote management greatly improves the operation and maintenance (O&M) and management efficiency for wireless network.

Eweb-based Management

The RG-AP9220 provides the Eweb for AC and AP management. O&M personnel can implement wireless configurations easily and manage a wireless network in an all-round manner. On the Eweb of ACs, O&M personnel can manage APs as well as clients connected to the APs and limit the rates and network access behaviors of clients. Through the Eweb, O&M personnel can plan, manage, and maintain wireless networks conveniently.

Association with Network Management Software

The RG-AP9220 can be associated with RG-INC, which can manage all ACs and APs on a network, including device configuration backup and device status query. RG-INC provides a wireless heat map to display the wireless signal distribution of APs in the actual environment.

06 Solution Scalability Capabilities

Ruijie WIS Cloud Management Network Solution (WIS Cloud for short, <https://wiscloud.ruijienetworks.com>) provides full-lifecycle cloud management network services covering network procurement, planning, deployment, acceptance, and O&M. When the RG-AP9220 is connected to WIS Cloud, it can meet various needs in multiple scenarios including planning, deployment, acceptance, and operation through cloud management, cloud O&M, cloud authentication, and other value-added services provided by WIS Cloud.

Network-Wide Cloud Management


WIS Cloud supports integrated management and control of various types of devices including APs, ACs, switches, gateways, and routers. It supports remote O&M management operations such as adding or batch importing of multi-branch network devices, online status monitoring, configuration delivery, upgrade, restart, configuration backup, and restoration. It supports network-wide topology auto-discovery and topology status monitoring.

Device Name	SN	MAC Address	AC	AP Group	Device Model	Site	Management IP	Last Offline Time
China-3000-9614	0000	3000-9614	WS0716-A	default			192.168.0.1	2023-07-27 17:51:46
China-0000-9604	0000	0000-9604	WS0716-A	default			192.168.0.1	2023-08-14 16:50:26
China-0000-9604	0004	0000-9604	WS0716-A	default			192.168.0.1	2023-07-27 17:52:01
China-0000-9604	0700	0000-9604	WS0716-A	default			192.168.0.1	2023-08-12 17:50:52
China-0000-9604	2100	0000-9604	WS0716-A	default			192.168.0.1	2023-08-12 17:51:11
China-3000-9602	1600	3000-9602	WS0716-A	default			192.168.0.1	2023-07-27 17:51:46
China-0000-9604	0007	0000-9604	WS0716-A	default			192.168.0.1	2023-07-27 17:52:02
China-0000-9604	1604	0000-9604	WS0716-A	default			192.168.0.1	2023-07-27 17:52:02
China-3000-9614	0044	3000-9614	WS0716-A	default			192.168.0.1	2023-07-27 17:51:45
China-3000-9614	0021	3000-9614	WS0716-A	default			192.168.0.1	2023-08-03 05:48:17

Wireless Network Visualization

The overview function module of WIS Cloud provides a comprehensive view of the network running status from the perspective of overview, experience, users, devices, and environment. The network running information includes the following items:


- Network basic information: device stability, device health, user stability, network signal coverage, and network association.
- User usage: user activity (network dependency), and user online experience and analysis
- Network saturation: network capacity usage and channel usage

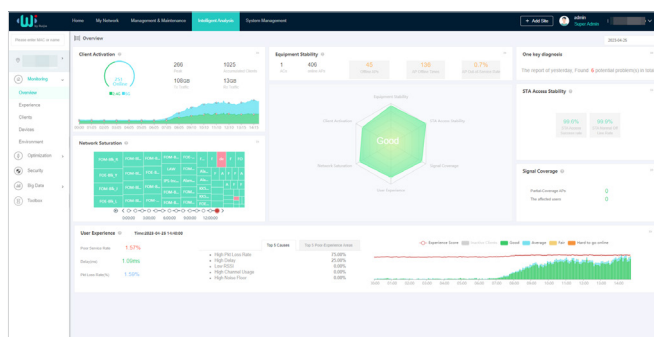

Intelligent Network Diagnosis

With WIS Cloud, wireless network diagnosis and health index assessment can be completed in just one click,

providing test results for each item. The health index provided by WIS Cloud enables you to rapidly assess the state of your live network. WIS Cloud can locate faulty areas, APs, and STAs, and provides potential risks and corresponding optimization suggestions.

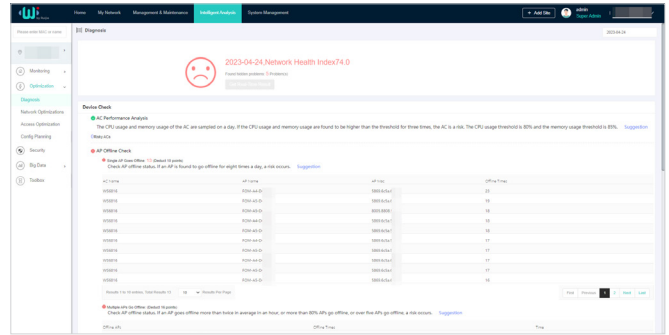

07 Specifications

Hardware Specifications

Hardware Specifications	RG-AP9220
802.11n	<p>Four spatial streams</p> <ul style="list-style-type: none"> Radio 1 – 2.4 GHz: 2x2 MIMO, two spatial streams Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> Radio 1 – 2.4 GHz: 20 MHz and 40 MHz Radio 2 – 5 GHz: 20 MHz and 40 MHz <p>Combined peak data rate: 600 Mbps</p> <ul style="list-style-type: none"> Radio 1 – 2.4 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS15) Radio 2 – 5 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS15) <p>Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> Aggregate MAC Protocol Data Unit (A-MPDU) Aggregate MAC Service Data Unit (A-MSDU) <p>Dynamic Frequency Selection (DFS)</p> <p>Cyclic Delay/Shift Diversity (CDD/CSD)</p> <p>Maximum Ratio Combining (MRC)</p> <p>Space-Time Block Coding (STBC)</p> <p>Low-Density Parity Check (LDPC)</p> <p>Transmit beam-forming (TxBF)</p>
802.11ac	<p>Two spatial streams</p> <ul style="list-style-type: none"> Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> Radio 2 – 5 GHz: 20 MHz, 40 MHz, 80 MHz, and 160 MHz <p>Combined peak data rate: 1.733 Gbps</p> <ul style="list-style-type: none"> Radio 2 – 5 GHz: 6.5 Mbps to 1.733 Gbps (MCS0 to MCS9) <p>Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> Aggregate MAC Protocol Data Unit (A-MPDU) Aggregate MAC Service Data Unit (A-MSDU) <p>Dynamic Frequency Selection (DFS)</p> <p>Cyclic Delay/Shift Diversity (CDD/CSD)</p> <p>Maximum Ratio Combining (MRC)</p> <p>Space-Time Block Coding (STBC)</p> <p>Low-Density Parity Check (LDPC)</p> <p>Transmit beam-forming (TxBF)</p>

Hardware Specifications	RG-AP9220
802.11ax	<p>Four spatial streams</p> <ul style="list-style-type: none"> Radio 1 – 2.4 GHz: 2x2 MIMO, two spatial streams Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> Radio 1 – 2.4 GHz: 20 MHz and 40 MHz Radio 2 – 5 GHz: 20 MHz, 40 MHz, 80 MHz, and 160 MHz <p>Combined peak data rate: 2.976 Gbps:</p> <ul style="list-style-type: none"> Radio 1 – 2.4 GHz: 7.3 Mbps to 0.574 Gbps (MCS0 to MCS11) Radio 2 – 5 GHz: 7.3 Mbps to 2.402 Gbps (MCS0 to MCS11) <p>Radio technologies: uplink/downlink Orthogonal Frequency-Division Multiple Access (OFDMA)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> Aggregate MAC Protocol Data Unit (A-MPDU) Aggregate MAC Service Data Unit (A-MSDU) <p>Dynamic Frequency Selection (DFS)</p> <p>Cyclic Delay/Shift Diversity (CDD/CSD)</p> <p>Maximum Ratio Combining (MRC)</p> <p>Space-Time Block Coding (STBC)</p> <p>Low-Density Parity Check (LDPC)</p> <p>Transmit beam-forming (TxBF)</p> <p>WPA3</p>
802.11be	<p>Four spatial streams</p> <ul style="list-style-type: none"> Radio 1 – 2.4 GHz: 2x2 MIMO, two spatial streams Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> Radio 1 – 2.4 GHz: 20 MHz and 40 MHz Radio 2 – 5 GHz: 20 MHz, 40 MHz, 80 MHz, and 160 MHz <p>Combined peak data rate: 3.570 Gbps:</p> <ul style="list-style-type: none"> Radio 1 – 2.4 GHz: 7.3 Mbps to 0.688 Gbps (MCS0 to MCS13) Radio 2 – 5 GHz: 7.3 Mbps to 2.882 Gbps (MCS0 to MCS13) <p>Radio technologies: uplink/downlink Orthogonal Frequency-Division Multiple Access (OFDMA)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, 4096-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> Aggregate MAC Protocol Data Unit (A-MPDU) Aggregate MAC Service Data Unit (A-MSDU) <p>Dynamic Frequency Selection (DFS)</p> <p>Cyclic Delay/Shift Diversity (CDD/CSD)</p> <p>Maximum Ratio Combining (MRC)</p> <p>Space-Time Block Coding (STBC)</p> <p>Low-Density Parity Check (LDPC)</p> <p>Transmit beam-forming (TxBF)</p> <p>WPA3</p>
Antenna	<p>Wi-Fi</p> <ul style="list-style-type: none"> 2.4 GHz: two built-in omnidirectional smart antennas, with peak antenna gain of 3 dBi. 5 GHz: two built-in omnidirectional smart antennas, with peak antenna gain of 3 dBi. <p>Bluetooth</p> <ul style="list-style-type: none"> One built-in omnidirectional antenna, with peak antenna gain of 3.96 dBi.
Port	<p>1 x 100/1000/2.5GBASE-T port</p> <p>1 x 2.5GE SFP port, compatibility with 1GE modules, supporting auto-negotiation</p> <p>1 x RJ45 console port</p> <p>1 x Bluetooth 5.3</p>

Hardware Specifications	RG-AP9220
Status LED	1 x system status LED <ul style="list-style-type: none"> • AP power-on status • Software initialization status and upgrade status • Uplink service interface status • Wireless user online status • CAPWAP tunnel timeout • Specific AP locating
Button	1 x Reset button <ul style="list-style-type: none"> • Press the button for shorter than 2 seconds. Then the device restarts. • Press the button for longer than 5 seconds. Then the device restores to factory settings.
Dimensions (W x H x D)	Main unit: 200 mm x 200 mm x 40 mm (7.87 in. x 7.87 in. x 1.57 in.) Shipping: 240 mm x 227 mm x 72 mm (9.45 in. x 8.94 in. x 2.83 in.)
Weight	Main unit: 0.56 kg (1.23 lbs) Mounting bracket: 0.05 kg (0.11 lbs) Shipping: 0.8 kg (1.76lbs)
Mounting	Ceiling/Wall-mount
Lock option	Kensington lock and securing latch
Input power supply	The AP supports the following power supply modes: <ul style="list-style-type: none"> • 48 V DC/0.54 A power input over DC connector • PoE/PoE+ input, in compliance with IEEE 802.3af/at standard
Maximum power consumption	Maximum power consumption: 16 W DC power: 30 W, 2.4 GHz radio 2x2, 5 GHz radio 2x2 802.3at (PoE+): 30 W, 2.4 GHz radio 2x2, 5 GHz radio 2x2 802.3af (PoE): 12.95 W, 2.4 GHz radio 2x2, 5 GHz radio 2x2, The maximum channel widths in the 2.4 GHz and 5 GHz frequency bands are reduced to 20 MHz and 40 MHz. Idle mode: 7.4 W
Environment	Storage temperature: -40°C to +70°C (-40°F to +158°F) Storage humidity: 5% RH to 95% RH (non-condensing) Storage altitude: -500 m to +5,000 m (-1640.42 ft. to +16,404.20 ft.) Operating temperature: -10°C to +50°C (14°F to 122°F) Operating humidity: 5% RH to 95% RH (non-condensing) Operating altitude: -500 m to +5,000 m (-1640.42 ft. to +16,404.20 ft.) Note: At an altitude in the range of 1,800-5,000 m (5,905.51-16,404.20 ft.), every time the altitude increases by 220 m (721.78 ft.), the maximum temperature decreases by 1°C (1.8°F).
Mean Time Between Failure (MTBF)	200,000 hours (22 years) at the operating temperature of 25°C (77°F)
System memory	512 MB DDR3, 128 MB flash
Transmit power	2.4 GHz <ul style="list-style-type: none"> • Maximum transmit power: 22 dBm (158.49 mW) • Minimum transmit power: 14 dBm (25.12 mW) 5 GHz <ul style="list-style-type: none"> • Maximum transmit power: 24 dBm (251.19 mW) • Minimum transmit power: 15 dBm (31.62 mW) Note: <ul style="list-style-type: none"> • Adjusting the transmit power by percentage (recommended) and in 1dBm increments. • The transmit power is limited by local regulatory requirements. For details, see WLAN Country or Region Codes and Channel Compliance.

The following table lists the radio frequency performance of Wi-Fi including different frequency bands, protocols, and data rates. It is country-specific, and Ruijie Networks reserves the right of interpretation.

Wi-Fi Radio Performance	RG-AP9220		
Frequency Band and Protocol	Data Rate	Maximum Transmit Power per Transmit Chain	Maximum Receive Sensitivity per Receive Chain
2.4 GHz 802.11g	6 Mbps	22 dBm	-91 dBm
	24 Mbps	19 dBm	-85 dBm
	36 Mbps	18 dBm	-80 dBm
	54 Mbps	18 dBm	-74 dBm
2.4 GHz 802.11n (HT20)	MCS0	22 dBm	-85 dBm
	MCS7	17 dBm	-67 dBm
2.4 GHz 802.11n (HT40)	MCS0	21 dBm	-82 dBm
	MCS7	16 dBm	-64 dBm
2.4 GHz 802.11ax (HE20)	MCS0	22 dBm	-85 dBm
	MCS11	15 dBm	-58 dBm
2.4 GHz 802.11ax (HE40)	MCS0	21 dBm	-82 dBm
	MCS11	14 dBm	-54 dBm
2.4 GHz 802.11be (EHT20)	MCS0	22 dBm	-85 dBm
	MCS11	15 dBm	-58 dBm
2.4 GHz 802.11be (EHT40)	MCS0	21 dBm	-82 dBm
	MCS11	14 dBm	-54 dBm
5 GHz 802.11a	6 Mbps	24 dBm	-91 dBm
	24 Mbps	22 dBm	-85 dBm
	36 Mbps	21 dBm	-80 dBm
	54 Mbps	20 dBm	-74 dBm
5 GHz 802.11n (HT20)	MCS0	24 dBm	-85 dBm
	MCS7	20 dBm	-67 dBm
5 GHz 802.11n (HT40)	MCS0	24 dBm	-82 dBm
	MCS7	20 dBm	-64 dBm
5 GHz 802.11ac (VHT20)	MCS0	24 dBm	-85 dBm
	MCS7	20 dBm	-67 dBm
5 GHz 802.11ac (VHT40)	MCS0	24 dBm	-82 dBm
	MCS9	18 dBm	-57 dBm
5 GHz 802.11ac (VHT80)	MCS0	24 dBm	-82 dBm
	MCS9	18 dBm	-56 dBm
5 GHz 802.11ax (HE20)	MCS0	24 dBm	-85 dBm
	MCS11	17 dBm	-58 dBm
5 GHz 802.11ax (HE40)	MCS0	24 dBm	-82 dBm
	MCS11	17 dBm	-54 dBm
5 GHz 802.11ax (HE80)	MCS0	24 dBm	-82 dBm
	MCS9	18 dBm	-56 dBm
	MCS11	17 dBm	-52 dBm
5 GHz 802.11ax (HE160)	MCS0	24 dBm	-79 dBm
	MCS9	18 dBm	-53 dBm
	MCS11	17 dBm	-50 dBm

Wi-Fi Radio Performance	RG-AP9220		
Frequency Band and Protocol	Data Rate	Maximum Transmit Power per Transmit Chain	Maximum Receive Sensitivity per Receive Chain
5 GHz 802.11be (EHT80)	MCS0	24 dBm	-82 dBm
	MCS9	18 dBm	-56 dBm
	MCS11	17 dBm	-52 dBm
	MCS13	15 dBm	-46 dBm
5 GHz 802.11be (EHT160)	MCS0	24dBm	-79 dBm
	MCS9	18 dBm	-53 dBm
	MCS11	17 dBm	-50 dBm
	MCS13	15 dBm	-44 dBm

Note: Available frequency bands may vary with countries or regions. To use the above-mentioned frequency bands, ensure that they are supported in your country or region. For details, see [WLAN Country or Region Codes and Channel Compliance](#).

Power Supply Mode	PoE Input (802.3af-Compliant)	PoE+ Input (802.3at-Compliant)	DC Power Input
Output power consumption	12.95 W	30 W	30 W
Radio 1 (2.4 GHz)	Supported 2x2 MIMO, 20 MHz	Supported 2x2 MIMO, 40 MHz	Supported 2x2 MIMO, 40 MHz
Radio 2 (5 GHz)	Supported 2x2 MIMO, 40 MHz	Supported 2x2 MIMO, 160 MHz	Supported 2x2 MIMO, 160 MHz
LAN port	Supported	Supported	Supported
Bluetooth low energy (BLE)	Supported	Supported	Supported

Software Specifications

Basic Function	RG-AP9220
Applicable software version	RGOS11.9(6)W3B19 or later
WLAN	
Maximum number of associated STAs	256 (up to 128 STAs per radio)
Practical maximum client count indication (per device)	64
Maximum number of BSSIDs	32 (up to 16 BSSIDs per radio)
Maximum number of WLAN IDs	16
STA management	SSID hiding Band steering (preferential access to the 5 GHz radio) Each SSID can be configured with the authentication mode, encryption mechanism, and VLAN attributes independently. Remote intelligent perception technology (RIPT) Intelligent load balancing based on the STA quantity or traffic
STA limiting	SSID-based STA limiting Radio-based STA limiting
Bandwidth limiting	STA/SSID/AP-based rate limiting

Basic Function	RG-AP9220
CAPWAP	<ul style="list-style-type: none"> IPv4/IPv6 CAPWAP Layer 2 and Layer 3 topology between an AP and an AC An AP can automatically discover the accessible AC. An AP can be automatically upgraded through the AC. An AP can automatically download the configuration file from the AC. CAPWAP through NAT MTU setting and fragmentation over CAPWAP tunnels Encryption over CAPWAP data tunnels Encryption over CAPWAP control tunnels
Data forwarding	Centralized and local forwarding
Wireless roaming	Layer 2 and Layer 3 roaming
Wireless locating	Mobile unit (MU) location
Security and Authentication	
Authentication and encryption	<ul style="list-style-type: none"> Remote Authentication Dial-In User Service (RADIUS) EXEC authorization, specifying source IP addresses of RADIUS packets, supporting authentication of other vendors, and built-in authentication server PSK, Web, 802.1X, WPA, WPA2, and WPA3 authentication MAB authentication Data encryption: WEP (64/128 bits), WPA (TKIP), WPA-PSK, WPA2 (AES), and WPA3
Data frame filtering	Allowlist, static blocklist, and dynamic blocklist
WIDS	<ul style="list-style-type: none"> Wireless Intrusion Detection System (WIDS) User isolation Rogue AP detection and containment
Dynamic Policy	<ul style="list-style-type: none"> IP standard ACL, MAC extended ACL, IP extended ACL, expert ACL, and IPv6 ACL Time range-based ACL ACL based on a Layer 2 interface ACL based on a Layer 3 interface Ingress ACL based on a wireless interface Dynamic ACL assignment based on 802.1X authentication (used with an AC)
CPP	CPU Protect Policy (CPP)
NFPP	<ul style="list-style-type: none"> Network Foundation Protection Policy (NFPP) ARP attack defense, ICMP attack defense, and DHCP attack defense
Routing and Switching	
MAC	<ul style="list-style-type: none"> Static MAC address, MAC address filtering, MAC address limiting MAC address table size: 1,024 Maximum number of static MAC addresses: 1,024 Maximum number of filtered MAC addresses: 1,024
Ethernet	<ul style="list-style-type: none"> Jumbo frame length: 1,518 Full-duplex and half-duplex modes of interfaces Optical module information display, alarms about faults, and diagnosis parameter measurement (QSFP+/SFP+/SFP)
VLAN	<ul style="list-style-type: none"> Interface-based VLAN assignment Maximum number of SVIs: 200 Maximum number of VLANs: 4,094 VLAN ID range: 1–4,094
ARP	<ul style="list-style-type: none"> ARP entry aging, gratuitous ARP learning, and proxy ARP Identification of IP address conflict among downlink users Maximum number of ARP entries: 1,024 ARP check

Basic Function	RG-AP9220
IPv4 services	Static IPv4 address and DHCP-assigned IPv4 address Maximum number of IPv4 addresses configured on each Layer 3 interface: 200 NAT, FTP ALG, and DNS ALG
IPv6 services	IPv6 addressing, Neighbor Discovery (ND), IPv6 ND proxy, ICMPv6, and IPv6 ping IPv6 DHCP client Maximum number of IPv6 addresses configured on each Layer 3 interface: 400
IP routing	IPv4/IPv6 static route Maximum number of static IPv4 routes: 1,024 Maximum number of static IPv6 routes: 1,000
Multicast	Multicast-to-unicast conversion
VPN	PPPoE client IPsec VPN
Network Management and Monitoring	
Network management	NTP server and NTP client SNTP client SNMP v1/v2c/v3 Fault detection and alarming Information statistics collection and logging
Network management platform	Web management (Eweb)
User access management	Console, Telnet, SSH, FTP client, FTP server, and TFTP client
Switchover among Fat, Fit, and cloud modes	When the AP works in Fit mode, it can be switched to Fat mode through an AC. When the AP works in Fat mode, it can be switched to Fit mode through the console port or Telnet. When the AP works in Cloud mode, it can be managed through WIS Cloud.

Regulatory Compliance


Regulatory Compliance	RG-AP9220
Regulatory Compliance	EN 55032 EN 55035 EN IEC 61000-3-2 EN 61000-3-3 EN 301 489-1 EN 301 489-3 EN 301 489-17 EN 300 328 EN 301 893 EN 300 440 EN IEC 62311 FCC Part 15 IEC 62368-1 EN 62368-1

* For more country-specific regulatory information and approvals, contact your local sales agency.

Note


- EU simplified DoC: Hereby, [Ruijie Networks Co., Ltd.] declares that the radio equipment type [RG-AP9220] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.ruijienetworks.com/>.

- UK simplified DoC: Hereby, [Ruijie Networks Co., Ltd.] declares that the radio equipment type [RG-AP9220] is in compliance with UK Radio Equipment Regulation 2017. The full text of the UK declaration of conformity is available at the following internet address: <https://www.ruijienetworks.com/>.
- The functions of Wireless Access Systems including Radio Local Area Networks(WAS/RLANs) within the band 5150-5350 MHz for this device are restricted to indoor use only within all European Union countries (BE/BG/CZ/DK/DE/EE/IE/EL/ES/FR/HR/ IT/CY/LV/LT/LU/HU/MT/NL/AT/ PL/PT/RO/SI/SK/FI/SE/TR/N O/CH/IS/LI/UK(NI))

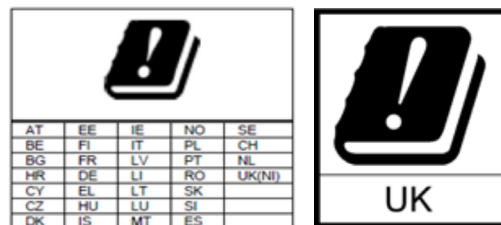


08 Antenna Pattern Plots

Horizontal Planes (Top View)

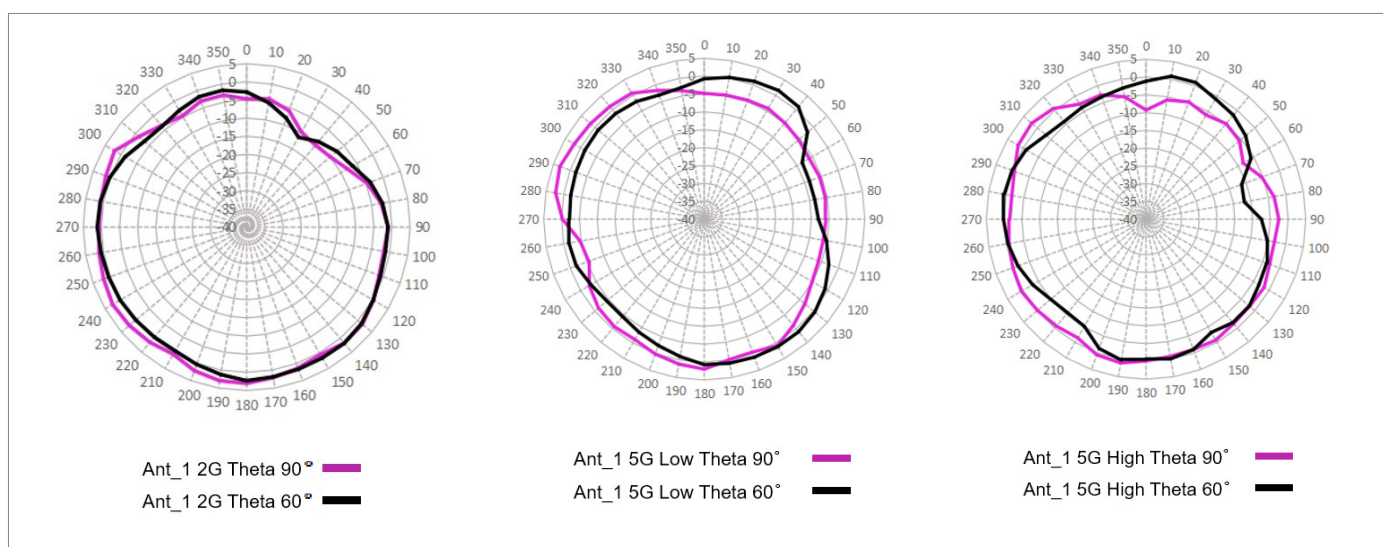

Vertical Planes (Front View)

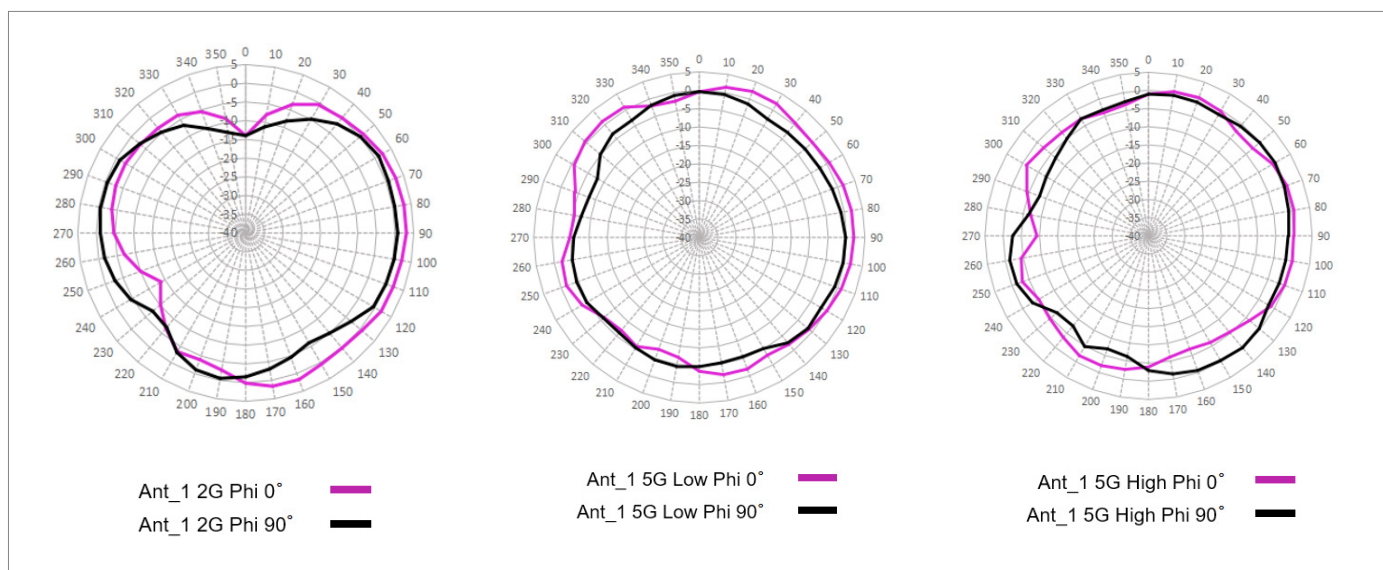

09 Ordering Information

Model	Description
RG-AP9220	<p>Wi-Fi 7 dual-radio indoor access point</p> <p>Up to four spatial streams, peak data rate of 3.570 Gbps</p> <ul style="list-style-type: none"> • Radio 1: 2.4 GHz: two spatial streams, 2x2 MIMO, peak data rate of 0.688 Gbps • Radio 2: 5 GHz: two spatial streams, 2x2 MIMO, peak data rate of 2.882 Gbps <p>The AP consumes one license of an AC.</p> <p>In compliance with IEEE 802.11 a/b/g/n/ac/ax/be standard</p> <p>Fat/Fit/Cloud mode switching. IEEE 802.3af/at-compliant (PoE/PoE+) and DC power supply</p> <p>Note: The DC power supply needs to be purchased separately, and the output voltage/current must be 48 V/0.54 A.</p>

10 Package Contents

Item	Quantity
RG-AP9220 access point	1
Mounting bracket	1
ST4.2 x 20 mm PWA Philips pan head self-tapping screw	4
Plastic expansion anchor	4
M4 x 16 mm Philips self-tapping screw	1
<i>Quick Start Guide</i>	1
<i>Warranty Card and Hazardous Substance Table</i>	1
Ruijie wireless product management software (pre-installed on the AP)	1

11 Warranty

For more information about warranty terms and period, contact your local sales agency.

- Warranty terms: <https://www.ruijienetworks.com/support/servicepolicy>
- Warranty period: <https://www.ruijienetworks.com/support/servicepolicy/Service-Support-Summary/>

Note: The warranty terms are subject to the terms of different countries and distributors.

12 More Information

For more information about Ruijie Networks, visit the official website of Ruijie Networks or contact your local sales agency:

- Ruijie Networks official website: <https://www.ruijienetworks.com/>
- Online support: <https://www.ruijienetworks.com/support>
- Hotline support: <https://www.ruijienetworks.com/support/hotline>
- Email support: service_rj@ruijienetworks.com
- *WLAN Country or Region Codes and Channel Compliance*: https://www.ruijienetworks.com/support/documents/slide_wlan-country-codes-overview

Ruijie



Ruijie Networks Co., Ltd.

For more information, visit www.ruijienetworks.com or call 86-400-620-8818.