

*New hassle-free smart control panel for your home*

The akubela HyPanel Supreme, a 12.35-inch smart home control center featuring a high-definition 2560 × 1600 resolution screen with ultra-slim bezels. Its minimalist metal exterior seamlessly integrates high-end aesthetics, delivering a visually stunning experience. Powered by Android 12, it supports various smart home control apps and achieves seamless integration between third-party apps and the original interface. It also boasts built-in sensors for temperature, humidity, gesture recognition, light, enhancing data collection and analysis capabilities. It is designed to bring whole-house smart automation, providing an outstanding user experience.

*At a Glance*

- 12.35 inch touchscreen with metal frame
- 2.5K(2560×1600) UHD display
- Built in with 2 channels dry contact, 1 digital input
- Multi networks supported: Wi-Fi 6, Bluetooth 5.0, ZigBee 3.0, etc.
- Built in with multiple sensors
- Android 12 OS
- Intercom, ZigBee gateway and smart home control panel in one device
- Compatible with various third-party devices and platforms



## Basic Information

- Model Number: PHX1-KNX-EU
- Power Supply: 12~24VDC
- I/O: 0~5VDC digital input x1  
4A 100~240VAC/gang dry contact x2
- Operation System: Android 12
- RAM/ROM: 4GB/32GB
- Wi-Fi: WiFi6, @2.4GHz/5GHz
- Bluetooth: Bluetooth 5.0
- Ethernet Port: 1xRJ45, 10/100Mbps adaptive
- ZigBee: ZigBee 3.0
- Microphone: Dual microphones
- Speaker: Dual speakers
- Camera: 5-megapixel camera with privacy shutter

## Appearance

- Material: Metal frame
- Screen: 12.35" multi-touch screen
- Screen Resolution: 2560×1600 pixels
- Screen Brightness: 400 cd/m<sup>2</sup>


## Sensors Built In

- Gesture Recognition Sensor: Support
- Proximity Sensor: 30~100cm
- Light Sensor: Low-level lux detection
- Temperature Sensor:  $\pm 1^{\circ}\text{C}$ , range:  $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$
- Humidity Sensor:  $\pm 5\%$ , range: 10%~90%RH, without condensation

## Working Environment

- Environment: For indoor use only
- Working Humidity: 10%~90%RH, without condensation

## Product Dimension Diagram (mm)

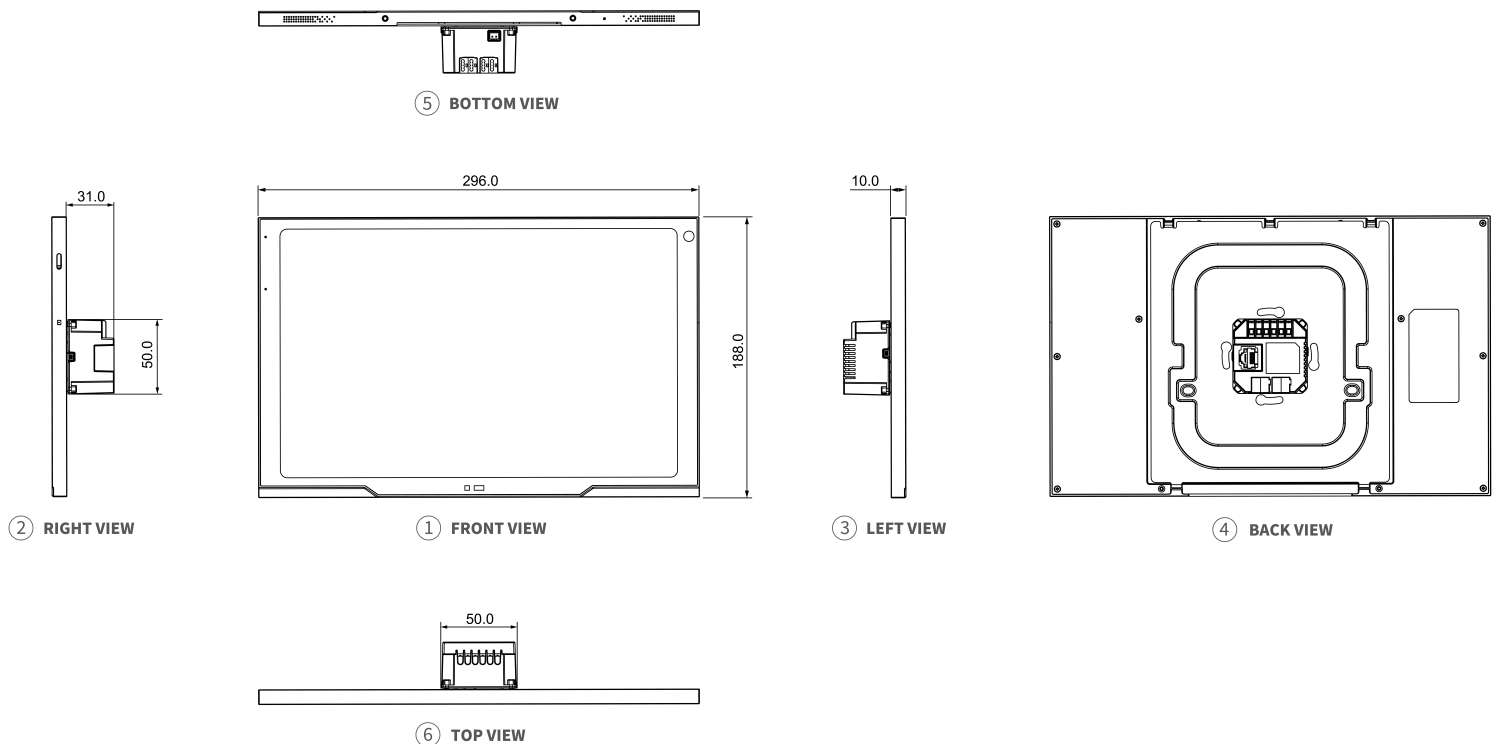

- Working Temperature:  $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$
- Storage Temperature:  $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$

## Installation

- Installation: Wall flush mounting
- Flush Mounted Module: EU/UK standard

## Application Scenario

- Villas
- Apartment complexes
- Home automation systems
- Modern interiors